


PRV

PATENT- OCH REGISTRERINGSVERKET
Patentavdelningen



Intyg Certificate



Härmed intygas att bifogade kopior överensstämmer med de handlingar som ursprungligen ingivits till Patent- och registreringsverket i nedannämnda ansökan.

This is to certify that the annexed is a true copy of the documents as originally filed with the Patent- and Registration Office in connection with the following patent application.

- (71) *Sökande* *Telefonaktiebolaget L M Ericsson, Stockholm SE*
 Applicant (s)
- (21) *Patentansökningsnummer* *9902625-4*
 Patent application number
- (86) *Ingivningsdatum* *1999-07-08*
 Date of filing
- (30) *Prioritet begärd från* *1999-01-27 SE 9900270-1*

Stockholm, 2000-02-17

För Patent- och registreringsverket
For the Patent- and Registration Office

Anita Södervall

Anita Södervall

Avgift
Fee *170.-*

**A PORTABLE MULTI-BAND COMMUNICATION DEVICE, AND A METHOD
FOR DETERMINING A CHARGE CONSUMPTION THEREOF**

5 **Technical Field**

 The present invention relates to portable multi-band
communication devices having a power amplifier, a battery
for supplying power to the power amplifier, and a con-
troller which is arranged to control an output power level
10 of the communication device by generating a digital
control signal for the power amplifier. More specifically,
the invention is directed at providing portable multi-band
communication devices with improved functionality for
charge consumption determination to be used for estimating
15 remaining battery capacity. The invention also relates to
a method for such charge consumption determination.

Prior Art

 Users of portable battery-powered communication
20 devices are dependent of a fully functional device. More
specifically, the users need to know exactly for how long
their devices will remain functional, until the electric
energy stored in the battery has been consumed and the
battery has to be recharged. This is particularly true for
25 users of mobile telephones. Hence, for the rest of this
document a mobile telephone is used, in a non-limiting
sense, for exemplifying the inventive portable communica-
tion device and method.

 In order to determine a precise estimation of the
30 remaining operational time of the mobile telephone, the
user needs an accurate and well-functioning battery
capacity indicator or "fuel gauge". FIG 1 illustrates a
schematic mobile telephone 1 having a display 6, on which
an icon 13 is presented as a battery capacity indicator.
35 As shown in FIG 1, the battery icon 13 indicates that
approximately 25% remains of the initial battery charge.

The mobile telephone 1 may have further display facilities for determining and indicating an estimated remaining time of operation, i.e. an estimation of the time left until the battery will have to be recharged.

5 Determining the remaining battery capacity basically includes two separate current measurements; one measurement for the current flowing into the battery (charging) and one measurement for the current consumed from the battery (discharging).

10 The charging current is often relatively easy to measure. A microprocessor (CPU) may read an A/D-converted signal, which is directly proportional to the current flowing through a small resistor. Since the microprocessor controls the charging process, it will also have access to
15 all relevant data for calculating the total current, that has been supplied to the battery during a certain period of time.

Measuring the discharge current or current consumption, on the other hand, is much more difficult, particularly for advanced telephones with complex functionality and many operating modes. Traditionally, discharge current is measured by calculating the expected current consumption, when the telephone is in different operating modes. Earlier mobile telephones basically had two operating
25 modes only; talk mode and standby mode. For such mobile telephones, the current consumption in talk mode and standby mode, respectively, was measured once in a test laboratory environment and stored in memory in the telephone as a respective predetermined consumption value. In
30 operation, the telephone would keep track of the time spent in talk mode and in standby mode, respectively, and subsequently calculate the total amount of current consumed from the battery by multiplying the respective operational times with the predetermined consumption
35 values.

Such an approach is disclosed in US-A-5 248 929, wherein a microprocessor in the mobile telephone regularly executes an interrupt-driven software routine (once every 100 ms), during which the momentary operational mode is
5 determined. The predetermined consumption values are read from memory, and the resulting charge consumption value is added to an accumulated value, which in turn is used for determining remaining battery capacity and operational time in talk mode and standby mode.

10 Although providing an acceptable charge consumption estimation for a simplified scenario with only two operating modes, the prior art approach described above has not proven applicable to more advanced telephones having a plurality of operational modes. For instance, the
15 charge consumption of a contemporary TDMA ("Time Division Multiple Access") telephone does not only depend of whether the telephone is in standby mode or talk mode; the charge consumption is affected by at least the following conditions in standby mode and talk mode, respectively:

20 Standby mode

- Number of neighboring base stations
- Paging frequency
- Backlight
- LCD icon mode on/off
- 25 • Location update frequency
- Top indicator
- Accessory connected/disconnected

30 Talk mode

- Output power
- Backlight
- Band (900/1800/1900 MHz)
- HR/FR/EFR (Half Rate/Full Rate/Enhanced Full
Rate), i.e. speech encoder mode
- 35 • HF algorithm

- DTX/no DTX (Discontinuous Transmission)
- DRX/no DRX (Discontinuous Reception)
- Accessory connected/disconnected

Of the above, the output power in talk mode has a
5 major influence on the battery charge consumption. For a
telephone which operates in more than one frequency band,
i.e. a multi-band telephone, the output power is different
for different frequency bands. Conclusively, in view of
all the other parameters, which will affect the charge
10 consumption, a multi-band telephone will have a very large
number of different operating modes. Previously known
approaches fail to provide accurate and still efficient
charge consumption determination, and consequently there
is an urgent need for an alternative way of determining
15 battery charge consumption for a multi-band telephone.

Summary of the Invention

The object of the present invention is to provide a
new and substantially improved way of determining battery
20 charge consumption for a portable multi-band communication
device, such as a mobile telephone.

Generally, the object has been achieved by the
following inventive understandings. Firstly, the aforesaid
problem that a multi-band communication device inherently
25 has a very large number of different operating modes,
thereby making conventional charge consumption estimation
both complex and inaccurate, can be avoided by making use
of an already existing power amplifier control facility.
More specifically, whenever voice or data is to be trans-
30 mitted from a multi-band telephone, the transmission has
be carried out at correct output power level, which - as
described above - depends on the frequency band used.
Correct output power is obtained by the controller by
regulating an analog control signal to the power amplifier
35 module. To this end, the controller calculates a proper

digital (e.g. hexadecimal) value (DAC value), which is converted by a D/A (digital-to-analog) converter into the analog control signal to the power amplifier.

Now, according to the invention, since the power
5 amplifier consumes a major part of the total current drawn from the battery in talk mode, the charge consumption of the power amplifier may be accurately predetermined for different DAC values, preferably by way of measurements in a test laboratory environment, before the telephone is
10 initially being used. Consequently, these predetermined charge consumption values will be associated with a respective one of all possible DAC values and will be prestored in a memory of the telephone.

Furthermore, according to the invention, these
15 prestored charge consumption values are used by the controller for keeping record of an accumulated charge consumption value between subsequent battery chargings. This is possible, since the controller is also responsible for generating the DAC values whenever a transmission is
20 to take place. Therefore, the controller will always have access to the momentary DAC value and may read a corresponding prestored charge consumption value to be added to the accumulated value.

The invention is particularly well adapted for a
25 TDMA telephone, which uses different control pulses or "strokes" for switching on and off different radio circuits, e.g. power amplifier, filters and synthesizer, as well as other electronic circuits, e.g. A/D converters. The strokes are all completely controlled by the
30 microprocessor in such a way, that the telephone may send and receive in the correct timeslot.

More specifically, the object above has been achieved by a portable communication device and a method of determining the charge consumption thereof according to
35 the appended independent patent claims. Other objects,

features and advantages of the present invention will appear from the following detailed disclosure, from the attached drawings as well as from the dependent claims.

5 **Brief Description of the Drawings**

A preferred embodiment of the present invention will now be described in more detail, reference being made to the accompanying drawings, in which:

10 FIG 1 is a schematic front view of a mobile telephone having a graphical indicator for remaining battery capacity,

FIG 2 is a schematic block diagram of the principal electronic and electric components of the mobile telephone shown in FIG 1,

15 FIG 3 schematically illustrates a hardware implementation according to the first embodiment,

FIGS 4 and 5 are flow charts illustrating a software implementation according to the first embodiment,

20 FIGS 6-8 illustrate a second embodiment of the present invention and

FIGS 9-11 illustrate a third embodiment of the invention.

Detailed Disclosure of Embodiments

25 Some embodiments of the present invention will now be described in detail by referring to a mobile telephone 1 shown in FIG 1. However, as already mentioned, the present invention is equally applicable to all other portable communication devices, which fall under the
30 definitions in the independent claims.

The mobile telephone 1 is a cellular GSM TDMA telephone and comprises an antenna 2, a top indicator 3 for indicating operational status, a speaker 4, volume adjustment buttons 5, a graphical display 6, a set of keys in a
35 keypad 7 and a flip 8, which is pivotally mounted to a

telephone housing 11 by means of a hinge 12. The flip 8 has a speech opening 9 for receiving vocal acoustic energy from the user of the telephone. The acoustic energy is transmitted through the flip 8, via an internal sound
5 guiding channel not shown in the drawing, to an internal microphone (not shown) in the telephone housing 11.

The display 6 comprises a signal strength indicator 14, a telephone operator indicator, a date indicator 15 and a remaining battery capacity indicator 13.

10 The principal electronic circuitry of the mobile telephone is illustrated in FIG 2. From an overall point of view, the circuitry comprises an antenna 200, a radio block 210, a channel encoding/decoding block 220, a speech encoding/decoding block 230, a control block 240, a micro-
15 phone 250, a speaker 260 and a battery 270. Except for the control block 240, all blocks 200, 210, 220, 230, 250, 260 and 270 have a design and structure, which are well-known and typical for a TDMA telephone commonly available on the market. Therefore, these blocks are only given a brief
20 description below; the detailed architecture thereof is well-known to the skilled person.

The speech encoding/decoding block 230 comprises a speech encoder 232, an input of which is connected to an output of the microphone 250 and an output of which is
25 connected to an input of a channel encoder 222 in block 220. An output of the channel encoder 222 is connected to an input of a transmitter 214, which is part of the radio block 210. An output of the transmitter 214 is connected to the antenna 200. Hence, in a well-known way the
30 microphone 250 receives a spoken audible input from a user and converts it into a corresponding electric signal, which is supplied to the speech encoder 232. The speech encoder 232 applies either HR, FR or EFR speech encoding to the signal and supplies the result to the channel
35 encoder 222, which performs channel encoding according to

GSM TDMA standard. The output of the channel encoder 222 is fed to the transmitter 214, which comprises various electronic circuits, such as amplifiers, filters and mixers. A power amplifier 216 controls the output power level of the transmitter 214. In turn, the power amplifier 216 is controlled by an analog control signal Pwr Ctrl, which is supplied by the control block 240 as a digital signal (DAC value) and is converted into the analog Pwr Ctrl signal by a D/A (Digital-to-Analog) converter 218, as will be described in more detail below. The output of the transmitter 214 is a high-frequency TDMA signal in any available frequency band (such as 900 or 1800 MHz), and this signal is supplied to the antenna 200 and emitted into open air as electromagnetic waves propagating from the antenna 200.

Correspondingly, an incoming TDMA signal is received at the antenna 200 and processed by a receiver 212 in the radio block 210. Basically, the operation of the receiver 212 is the inverse of that of the transmitter 212. An output of the receiver 212 is decoded in a channel decoder 224 in block 220 and is furthermore decoded by a speech decoder 234 in block 230. The output thereof is supplied to the speaker 260, which converts the electric signal into acoustic soundwaves to be emitted to the user.

The battery 270 is arranged to supply power to the various electronic circuits in modules 210, 220, 230 and 240. Preferably, the battery 270 is any commercially available rechargeable battery, such as a Li-ion, NiMH or NiCd battery.

The control block 240 comprises a microprocessor or CPU (Central Processing Unit) 242, which is bidirectionally connected to a memory 244. Among other functions, the CPU 242 controls the various components in blocks 210, 220 and 230, as well as an A/D converter 248, by means of control signals indicated as unidirectional

arrows in FIG 2. More specifically, the components of the radio block 210, which consumes a majority of the total electric energy consumed from the battery 270, are controlled by the CPU 242 and an associated timing generator 246 by means of respective pulsed control signals or "strokes". Consequently, a "TX str" stroke is supplied by timing generator 246, under control from CPU 242, to the transmitter 214. Similarly, an "RX str" stroke controls the receiver 212. A separate stroke controls the A/D converter 248.

Up to this point, the architecture of the control block 240 as well as the operation thereof by way of different strokes are essentially identical to a standard GSM TDMA telephone.

According to the first embodiment, the control block 240 is provided with a stroke detector 247, which is arranged to detect the occurrence of strokes (i.e. control pulses having the purpose of switching specific circuits on and off) submitted by the timing generator 246 on individual control lines, which extend between the timing generator 246 and the transmitter 214 and receiver 212, respectively, of the radio block 210. Simultaneously, the stroke detector 247 is arranged to read a momentary value of the digital control signal (DAC value) supplied to the D/A converter 218 for controlling the output power level of the power amplifier 216. Additionally, the stroke detector 247 is arranged to count the number of TX strokes that have been generated for different output power levels (different DAC values). As will be described in more detail below, these will be used by the CPU 242 to determine a consumption of charge from the battery 270.

Before providing a detailed description of the functions of the stroke detector 247 and the CPU 242 for determining aforesaid charge consumption value, the inventive concept of using control signals or strokes for

the purpose of determining charge consumption will be discussed next.

As already mentioned, a TDMA telephone uses a number of control pulses or strobes, which are used to switch on and off i.a. various radio circuits. The strobes are all completely controlled by the CPU 242 in such a way, that the telephone is capable of sending and receiving in the correct TDMA timeslot. For instance, the TX strobe is activated at least once for each TDMA frame in order to switch on transmitter 214 and the components associated therewith, such as the power amplifier 216. The transmitter is activated, by the TX strobe, just before the correct timeslot and is then deactivated immediately after this timeslot, by switching the TX strobe from e.g. a high logical value to a low logical value. In normal talk mode, i.e. for a voice call, the TX strobe is generated exactly once in every TDMA frame by the CPU 242 and the timing generator 246, for as long as the ongoing telephone call lasts. In case of a data call, on the other hand, the number of TX strobes may be two or more (multislot) in each TDMA frame. Simultaneously, as described above, the CPU 242 determines a certain digital (hexadecimal) value of the digital control signal DAC value, which is converted into the analog control signal Pwr Ctrl used for regulating the power amplifier 216 in order to obtain a correct output power level of the transmitter 214.

Now, since the TX strobe activates/deactivates a well-defined set of electronic circuits in the transmitter 214 and the power amplifier 216, and since the individual charge consumption of each of these circuits is well-known and/or may be accurately measured once and for all, with respect to all possible DAC values, in a test laboratory environment, the different DAC values are associated, according to the invention, with respective predetermined specific current consumption values, representing the

current consumed by all relevant transmitter and power amplifier circuits upon activation by one TX strobe.

Consequently, by keeping track of the number of times that the TX strobe has occurred for different DAC values, the total current consumption, caused by TX strobes during a given period of time, may easily be calculated by multiplying the results of the count with the predetermined current consumption values per TX strobe.

As an important advantage, the inventive scheme described above will be completely independent of whether the telephone has been used for a voice call (involving exactly one TX strobe per TDMA frame) or a data call (multislot; possibly involving more than one TX strobe per TDMA frame). The detector 247 will simply keep track of all TX strobes, irrespective of in what frames they may appear.

In addition to the above also the RX strobe and other strobes may be monitored, such as an A/D strobe for controlling the A/D converter 248.

Returning to the detailed description of the first embodiment, the strobe detector 247 comprises a pulse counter register 300 shown in FIG 3. Since the current consumption during a TX strobe depends on the momentary power level of the transmission (as set by DAC value), the pulse counter register 300 comprises a plurality, or $n+1$, of memory cells TxStrobe[00], TxStrobe[01], TX strobe[02], ... TxStrobe[n]. Each memory cell corresponds to a respective DAC value.

Initially, all memory cells are cleared, i.e. set to 0. Then, each time a TX strobe is generated by the timing generator 246, the strobe detector 247 will increase the memory contents at memory cell TxStrobe[i], where i corresponds to the momentary transmission power level as set by DAC value.

As already mentioned, a current consumption value is associated with each memory cell in the pulse counter register 300. These current consumption values, which represent the respective amount of current consumed by relevant electronic circuits upon activation by the TX strobe for a particular DAC value, are stored in a current consumption register 310. In similarity with the pulse counter register 300, the current consumption register 310 may be located within the strobe detector 247, preferably implemented as an EEPROM memory, or alternatively the register may be stored in the conventional memory 244.

FIG 4 illustrates an algorithm for real-time monitoring of TX strobes according to the first embodiment. In this embodiment, the algorithm is executed by the strobe detector 247. Upon initialization, all memory cells TX strobe[] are cleared (set to 0) in a first step 400. Next, a loop comprising steps 410, 420 and 430 is continuously executed. A step 410 monitors whether a TX strobe has been detected. If no such strobe is detected, the control is immediately transferred back to the beginning of step 410. On the other hand, if the answer is in the affirmative, a momentary DAC value is determined in a step 420. Then, in step 430, the contents of the memory cell TxStrobe [DAC value] is incremented. After that, the control is transferred back to the beginning of step 410, thereby forming an endless loop. In this way, the control block 240 continuously monitors the occurrence of TX strobes and reads the associated momentary DAC values so as to keep track of the momentary current consumption caused thereby.

FIG 5 illustrates an algorithm executed by the control block 240 in order to determine an accumulated charge consumption value and use this for determining the remaining battery charge. As shown in step 500, an accumulated current consumption value is calculated by multi-

plying all memory cells TxStrobe[00...n] in the pulse counter register 300 with the corresponding memory cells TxCurrent[00...n] of the current consumption register 310. By summing the results of these multiplications and
5 finally multiplying with a predetermined duration $t_{TxStrobe}$ of a transmit burst, a total accumulated charge consumption value is obtained in step 500. This value is used in step 510 for determining the remaining battery charge, preferably by subtracting the accumulated charge
10 consumption value obtained in step 500 with a previous value of remaining battery capacity. Subsequently, in step 520, the battery icon 13 is updated on the display 6 to reflect the updated remaining battery charge estimation.

A second embodiment is illustrated in FIGs 6-8. As
15 shown in FIG 6, the second embodiment uses a single counter only (Current Count) instead of a table of counters, thereby saving memory. A current consumption register 610, holding predetermined current consumption values, is still used.

20 An algorithm for real-time monitoring of TX strobes according to the second embodiment is shown in FIG 7. The current counter is reset or initialized in step 700. In a step 710, it is monitored whether a TX strobe has been detected. If the answer is in the affirmative, the control
25 is transferred to step 720, where the momentary DAC value is determined. In step 730 the current counter is incremented by the contents of the memory cell TxCurrent[DAC value] of current consumption register 610, in accordance with the momentary DAC value determined in
30 step 720. On completion of step 730, the control is transferred back to the beginning of step 710.

FIG 8 illustrates an algorithm for updating the battery indicator according to the second embodiment. In
step 800, an accumulated charge consumption value is
35 simply calculated by multiplying the transmit burst

duration $t_{TxStrobe}$ with the value of the current counter. In subsequent steps 810 and 820, the remaining battery charge is determined, and the battery icon 13 is updated on the display 6, in similarity with steps 510 and 520 of FIG 5.

5 Compared to the first embodiment, the second embodiment represented by FIGs 6-8 is more memory-efficient and also avoids multiplication by complete registers, thereby saving CPU power efficiency.

A third embodiment of the invention is shown in FIGs 10 9-11. For the third embodiment, the memory efficiency has been further improved. The size of the current consumption register 910 has been reduced as compared to the first and second embodiments. This will cause essentially no, or at least very little, loss in accuracy by using interpolation 15 to obtain a correct current consumption value. In similarity with the second embodiment, the third embodiment uses one single current counter, but the current consumption register 910 has been reduced in size by only storing a current consumption value for every eighth DAC value.

20 The current consumption register 910 is indexed by calculating $idx-DAC$ value modulus 8. Two adjacent memory cells $TxCurrent[idx]$ and $TxCurrent[idx+1]$ are read, and these values are used for interpolating a correct current consumption value, as shown in the flow chart of FIG 10.

25 Steps 1000, 1010 and 1020 of FIG 10 are essentially identical to the corresponding steps of FIGs 4 and 7. In step 1030, as already mentioned, the index value idx is calculated as DAC value modulus 8. Then, in step 1040, a momentary current consumption value is obtained by linear 30 interpolation between the values $TxCurrent[idx]$ and $TxCurrent[idx+1]$, and the result thereof is added to the current counter. Subsequently, the control is transferred back to the beginning of step 1010.

The algorithm shown in FIG 11 for updating the 35 battery indicator is essentially identical to the

corresponding algorithms shown in FIGs 5 and 8 for the first and second embodiments, respectively.

According to yet another embodiment, the current consumption registers of the first, second and third
5 embodiments may be replaced by a polynomial, which describes current consumption as a function of DAC value, for further improved memory efficiency.

The procedures above, which have been described in relation to the TX strobe, may be extended to other
10 strokes and circuits, such as the A/D converter 248, the channel encoder 222, the channel decoder 224, the speech encoder 232 and the speech decoder 234. The TX strokes described above all have a fix length in time and may consequently alternatively be stored directly in the form
15 of charge consumption values (expressed in mAh). However, for strokes that are variable in length, the predetermined consumption values may be stored as current consumption values (in mA), and the individual duration of such variable-length strokes will be determined by the CPU 242
20 or the strobe detector 247. For instance, such a variable strobe length may be determined by adding a signal with a well-known frequency in a register during the duration of the individual strobe. Upon execution of the procedures for determining total charge consumption shown in FIGs 5,
25 8 and 11 the content of such a register directly represents the total time during which the particular strobe has been active. By simply multiplying this time with the associated current consumption value, the charge consumption related to the strobe may be determined.
30 According to an alternative embodiment, a power consumption value is obtained by multiplying the calculated total charge consumption with a value of the battery terminal voltage.

The invention has been described above with
35 reference to a few embodiments. However, the present

invention shall in no way be limited by the description above; the scope of the invention is best defined by the appended independent claims. Other embodiments than the particular ones described above are equally possible

5 within the scope of the invention. For instance, even if according to the above embodiments the determination of the total charge consumption is determined in both hardware (strobe detector 247) and software (routine executed by the CPU 242), the scheme may be implemented

10 solely in hardware, solely in software or partly in software and partly in hardware. Moreover, the invention is applicable also to other telephones than TDMA telephones, such as W-CDMA telephones.

CLAIMS

1. A portable multi-band communication device (1), comprising a power amplifier (216), a battery (270) for supplying power to the power amplifier, and a controller (240), the controller being arranged to control an output power level of the communication device by generating a digital control signal (DAC value) for the power amplifier, **characterized by**

the controller (240) being arranged to monitor the digital control signal (DAC value) and in response determine a consumption (ChargeConsumption, CurrentCount) of electric energy from the battery (270).

2. A portable multi-band communication device as in claim 1, further comprising a D/A (digital-to-analog) converter (218) operatively connected to the power amplifier (216), the D/A converter being arranged to receive, at an input thereof, the digital control signal (DAC value), convert the digital control signal into an analog control signal (Pwr Ctrl) and submit, at an output of the D/A converter, the analog control signal to the power amplifier.

3. A portable multi-band communication device as in claim 1 or 2, further comprising a memory (244) operatively connected to the controller (240), wherein the memory is adapted to store a set of predetermined consumption values (TxCurrent) associated with different values (00...n) of the digital control signal (DAC value).

4. A portable multi-band communication device as in claim 3, further comprising a radio transmitter (214), the operation of which is controlled through a control signal strobe (TX str) submitted by the controller (240), wherein the controller is arranged to:

PRV990708H

detect the control signal strobe (TX str) to the
radio transmitter,
determine a value (00...n) of the digital control
signal (DAC value),
5 form an index (idx) from the determined value of the
digital control signal,
use the index for reading one consumption value
(TxCurrent[idx]) in the pretermine set (TxCurrent) from
the memory (244), and
10 update an accumulated consumption value
(CurrentCount) to reflect the consumption value thus read.

5. A portable multi-band communication device as in
claim 3, further comprising a radio transmitter (214), the
15 operation of which is controlled through a control signal
strobe (TX str) submitted by the controller (240), the
memory (244) having a set of counters (TxStrobe) for
different values (00...n) of the digital control signal
(DAC value), wherein the controller is arranged to:
20 detect the control signal strobe (TX str) to the
radio transmitter,
determine a value (00...n) of the digital control
signal (DAC value),
increment, in said set of counters, the counter that
25 represents the determined value of the digital control
signal, and
subsequently calculate the consumption
(ChargeConsumption) of electric energy from the battery
(270) from the contents of said set of counters (TxStrobe)
30 and from the set of predetermined consumption values
(TxCurrent).

6. A portable multi-band communication device as in
any of claims 3-5, wherein the set of predetermined con-

sumption values (TxCurrent) is represented by a polynomial function.

7. A portable multi-band communication device as in
5 any preceding claim, the device further comprising a
graphical display (6), wherein the controller (240) is
arranged to calculate an estimated remaining battery
capacity by subtracting the determined consumption
(ChargeConsumption, CurrentCount) of electric energy from
10 a previous value of remaining battery capacity, and
wherein the controller is arranged to visually indicate
the calculated estimated remaining battery capacity (13)
on the graphical display.

15 8. A portable multi-band communication device as in
any preceding claim, wherein the device is a mobile tele-
phone (1), such as a TDMA telephone, or a W-CDMA tele-
phone.

20 9. A method of determining a charge consumption for
a portable battery-powered communication device (1), said
device comprising a radio transmitter (214), a power amp-
lifier (216) operatively connected to the radio trans-
mitter and a controller (240) operatively connected to the
25 power amplifier, wherein an output power level of the
radio transmitter is controlled by the power amplifier
through a digital control signal (DAC value) from the
controller, and wherein the radio transmitter is further-
more responsive to a control signal strobe (TX str),
30 **characterized by the steps of**

storing a set of predetermined consumption values
(TxCurrent) providing an association between different
amounts of electric charge consumption and respective
values of the digital control signal (DAC value),
35 detecting the control signal strobe (TX str),

selecting, from said set of predetermined consumption values (TxCurrent), a value which corresponds to the
5 determined value (00...n) of the digital control signal
(DAC value), and

10 10. A method according to claim 9, applied to a
mobile telephone (1).

ABSTRACT

A portable multi-band communication device has a power amplifier (216), a battery (270) for supplying power
5 to the power amplifier, and a controller (240), which controls an output power level of the communication device by generating a digital control signal (DAC value) for the power amplifier. The controller also monitors the digital control signal (DAC value) and in response determines a
10 consumption of electric energy from the battery (270).

To be published together with FIG 2.

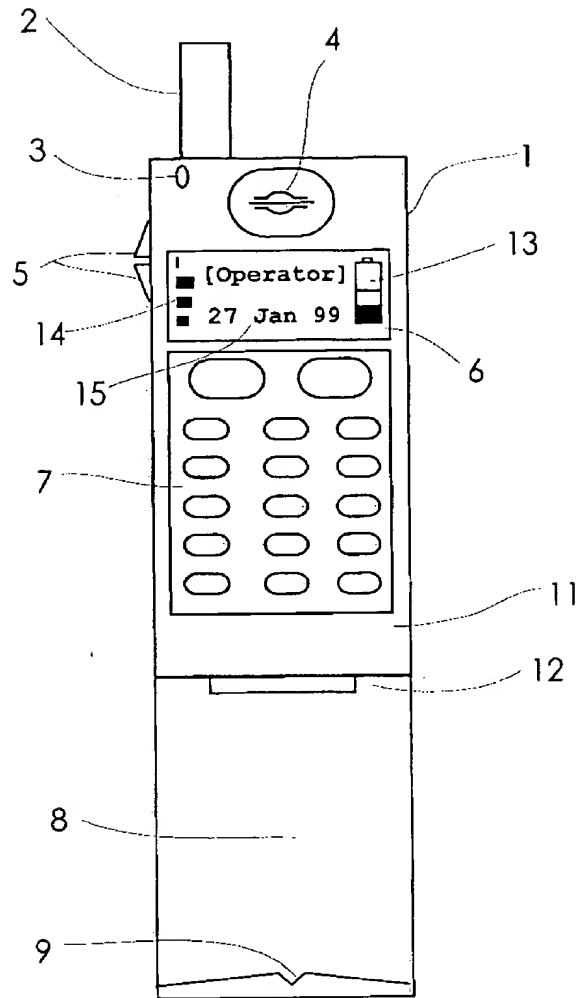


FIG 1

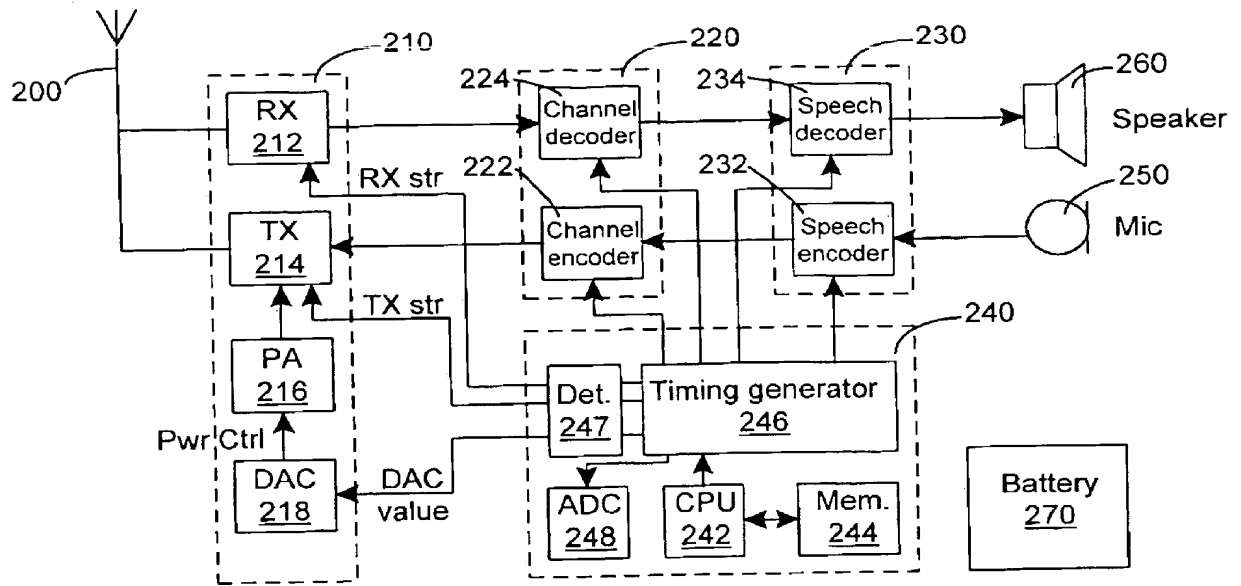


FIG 2

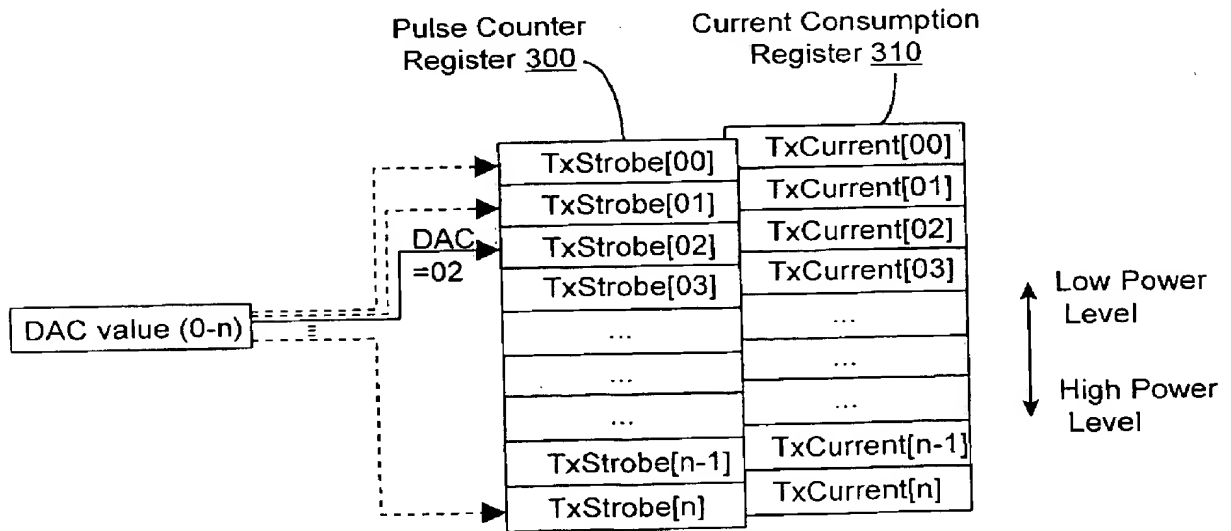


FIG 3
(1st embodiment)

3/6


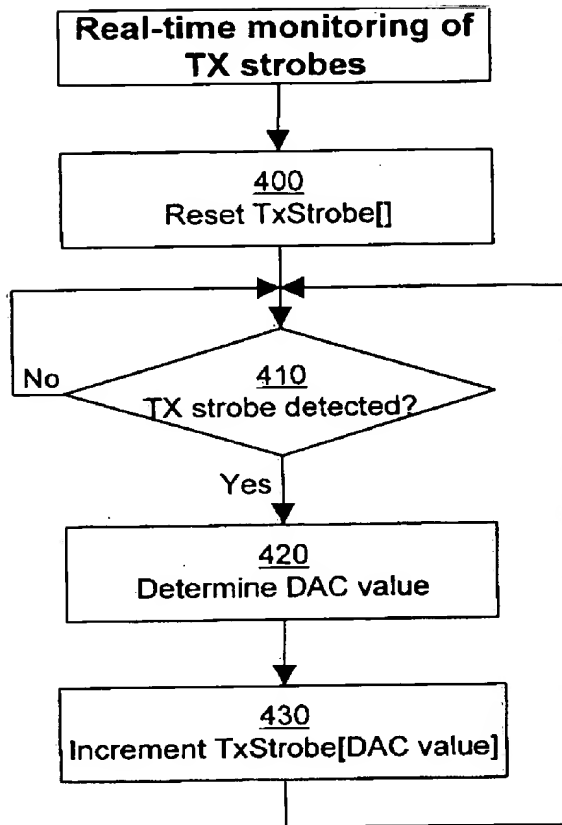


FIG 4
(1st embodiment)

FIG 5
(1st embodiment)

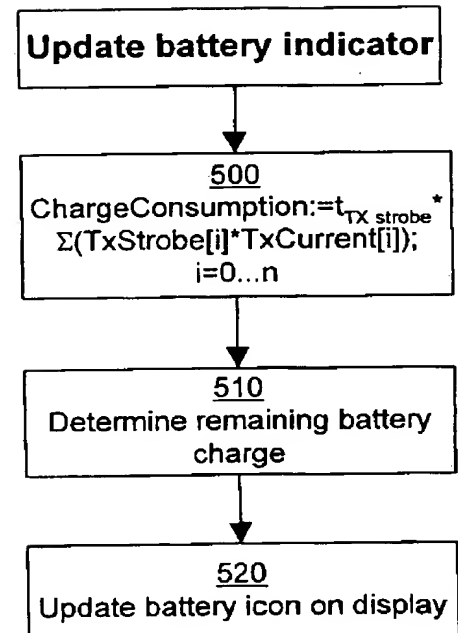

4/6

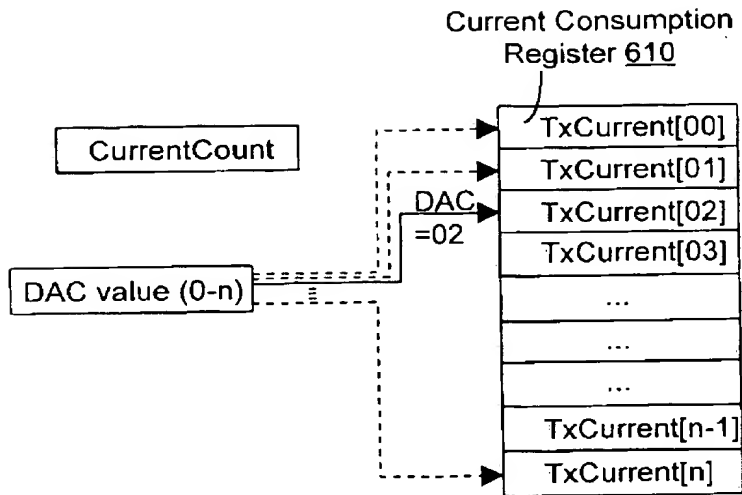


FIG 6
(2nd embodiment)

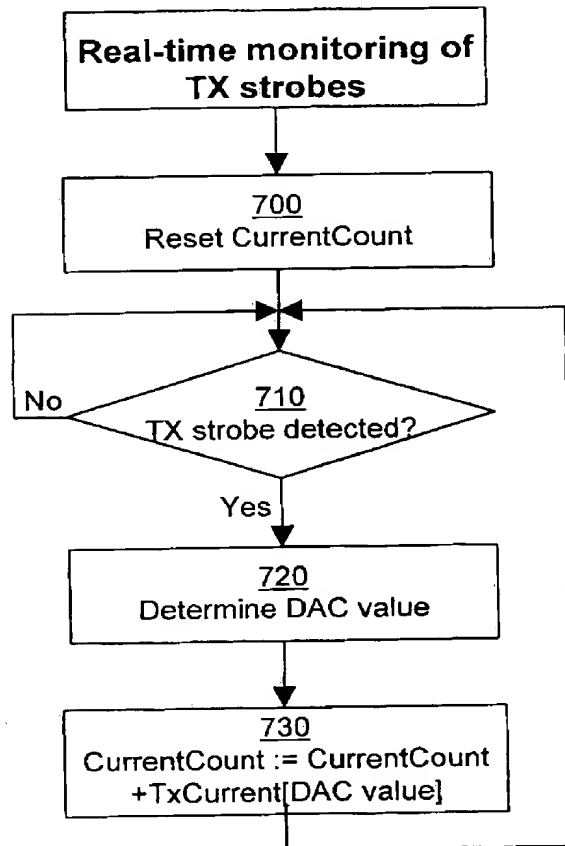


FIG 7
(2nd embodiment)

5/6

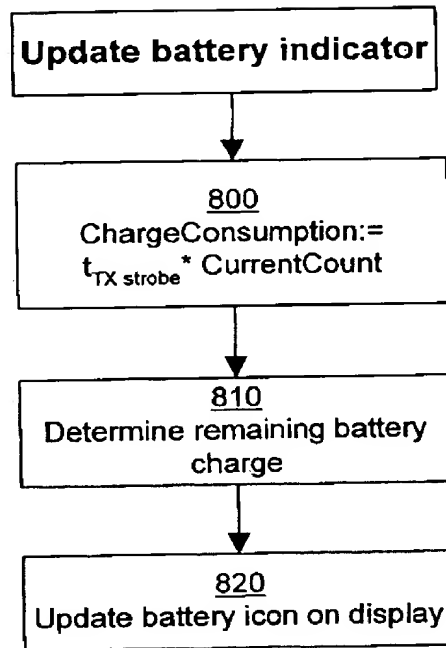


FIG 8
(2nd embodiment)

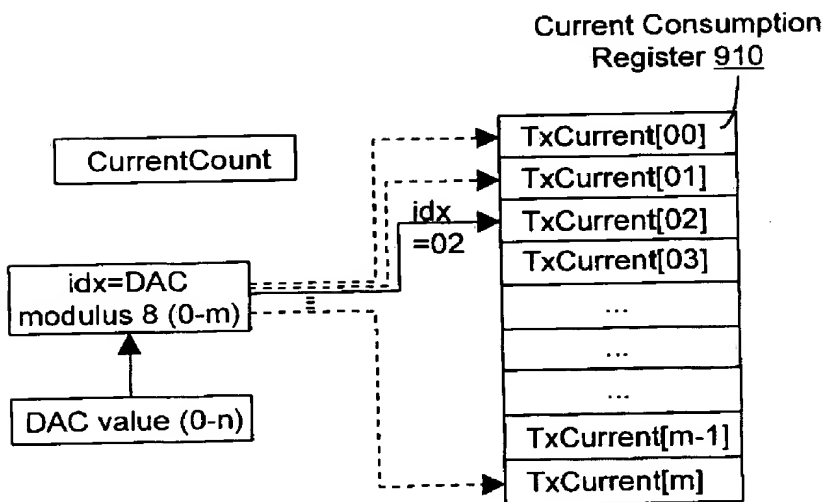


FIG 9
(3rd embodiment)

6/6

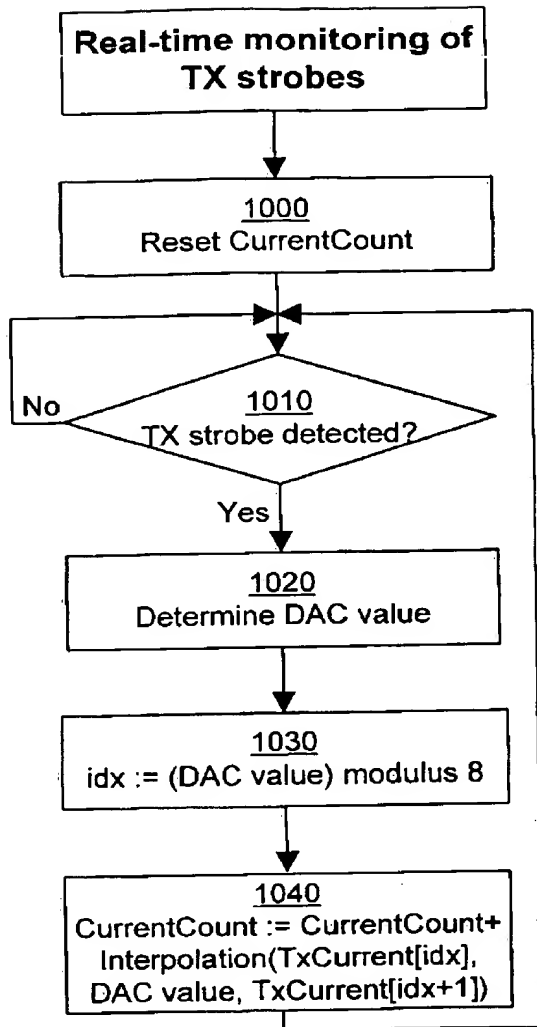


FIG 11
(3rd embodiment)

FIG 10
(3rd embodiment)

